

VN Series

Small Electromagnetic Flow Sensor




- Compact and excellent cost performance
- Outstanding reliability with no moving parts
- Suitable for use in machines
- Easy-to-check 2-color LED(status) indicator

Overview


Model	VN 05	VN 10	VN 20
Flow range	0.05 to 1L/min	0.5 to 10L/min	3 to 60L/min
Connection	R1/4"	R1/2"	R1"
Accuracy	±2% RS		
Output	2 open collector outputs*		
Fluid conductivity	50 μS/cm and above		
Liquid temperature	0 to 60°C		
Maximum operation pressure	1 MPa at 25°C		
Enclosure	IP64		
Power supply	12-24 V DC 100mA		
Electrodes	SUS316L		
Sensor weight (approx.)	200g	200g	300g

* Possible to output two of the following: unit pulse, high density pulse, warning, and switch

Measurement principle

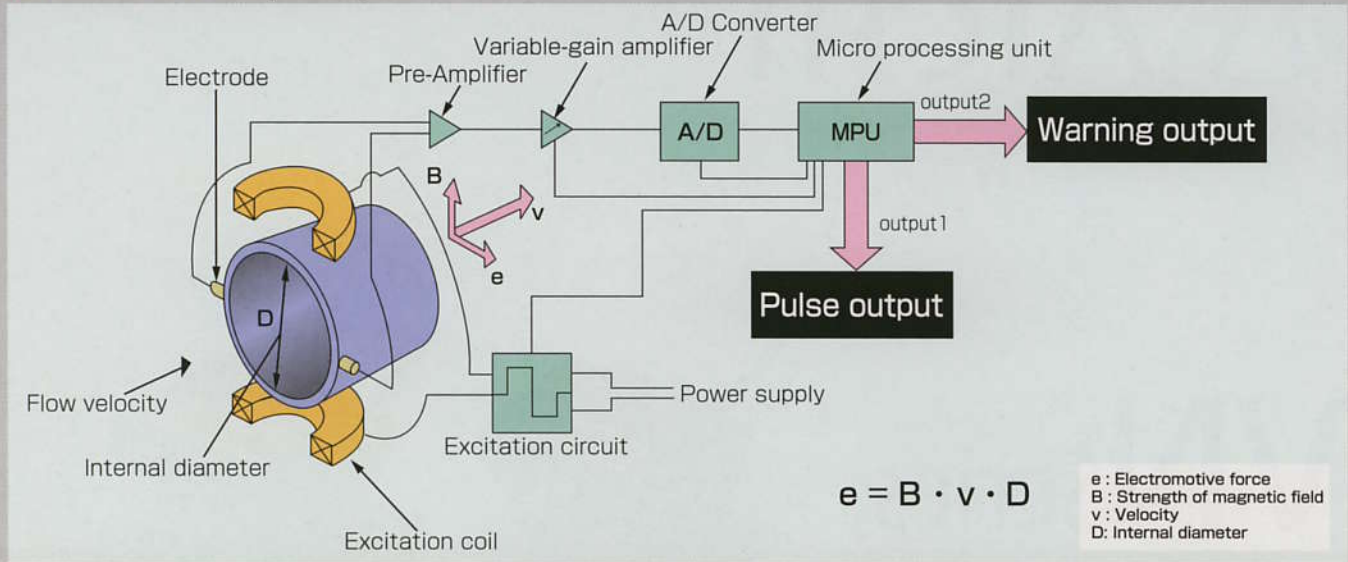


Accuracy

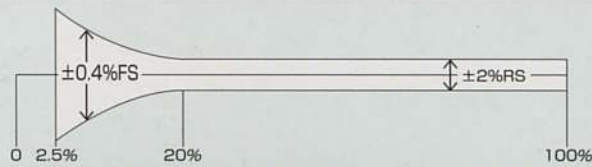

Examples of use

Coolant monitoring in molding machines / welding machines

Mold temperature controller

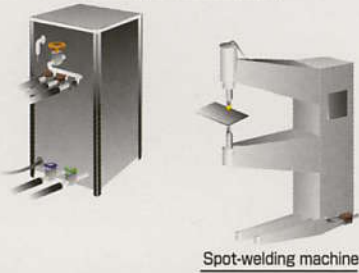

Feedback control in pump system




Medical devices




External dimensions


Unit : mm

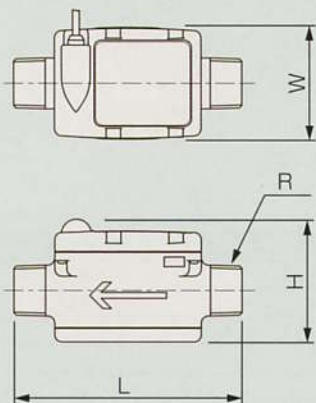

Nominal diameter	L	W	H	φD	R
VN05	85	47	49	5.2	1/4"
VN10	95	47	52	10	1/2"
VN20	110	49	62	20	1"



Fuel cell system

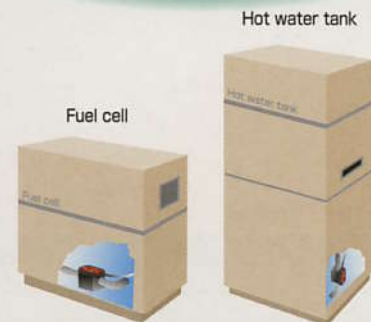

Aichi Tokei Denki Co., Ltd.

No. 2 - 70, Chitose 1 - chome,
Atsuta - ku, Nagoya 456 - 8691

Japan

Tel : +81-52-661-5150

Fax : +81-52-661-6418

<https://www.aichitokei.co.jp/eng/index.html>

E-mail: overseas@inet1.aichitokei.co.jp

Specifications are subject to change without notice.
Printed in Japan (03/06)