



#### Reliable

Reliable protection against overfilling

#### Cost effective

Independent of product and process characteristics

#### User friendly


Simple setup and commissioning, maintenance-free

## Bulk storage tanks

### Level measurement and point level detection in bulk storage tanks

Dependable storage is not only the basis for reliable production and supply, it also protects against raw material shortages and price volatility. In addition to regulations on the use of overfill protection or safety instrumented systems, large storage tanks are also often subject to hazardous area codes of practice in conjunction with level measurement.

[More details](#)

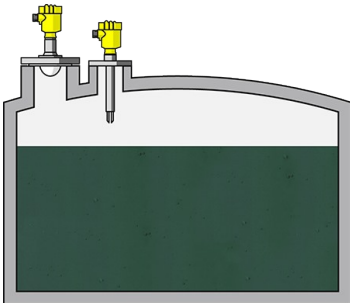

#### VEGAPULS 6X

Continuous level measurement with radar in bulk storage tanks

- Reliable measurement, independent of density and temperature changes
- Excellent signal focusing ensures high accuracy
- Long service life thanks to maintenance-free operation

[Show Product](#)



#### VEGASWING 63

Point level detection with vibrating level switch for overfill protection in bulk storage tanks

- Universally applicable as overfill and dry run protection system for virtually all liquid applications
- Accurate level detection thanks to adjustment-free, media-independent switching point
- Highly resistant materials and coatings for long operational life
- Test button for easy testing of instrument functionality during operation

[Show Product](#)

PRO

**VEGAPULS 6X**  
[Show Product](#)

**Measuring range - Distance**

120 m

**Process temperature**

-196 ... 450 °C

**Process pressure**

-1 ... 160 bar

**Accuracy**

± 1 mm

**Frequency**

6 GHz

26 GHz

80 GHz

**Beam angle**

≥ 3°

**Materials, wetted parts**

PTFE

PVDF

316L

PP

PEEK

**Threaded connection**

≥ G¾, ≥ ¾ NPT

**Flange connection**

≥ DN20, ≥ ¾"

**Hygienic fittings**

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -  
DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe ø53 - DIN11864-  
3-A

DRD connection ø 65 mm

SMS 1145 DN51

PRO

**VEGASWING 63**  
[Show Product](#)

**Process temperature**

-50 ... 250 °C

**Process pressure**

-1 ... 64 bar

**Version**

Standard

Hygienic applications

with gas-tight leadthrough

with tube extension

with temperature adapter

**Materials, wetted parts**

PFA

316L

Alloy C22 (2.4602)

Alloy 400 (2.4360)

ECTFE

Enamel

**Threaded connection**

≥ G¾, ≥ ¾ NPT

**Flange connection**

≥ DN25, ≥ 1"

**Hygienic fittings**

Clamp ≥ 1" - DIN32676, ISO2852

Slotted nut ≥ 1½", ≥ DN40 - DIN 11851

Varivent ≥ DN25

hygienic fitting F40 with compression nut

SMS 1145 DN51

SMS DN38

Hygienic fittings ≥ DN25 - DIN11864-1-A

Hygienic flange connection DIN11864-2-A;

DN60(ISO)ø60,3

SMS socket piece DN38 PN6

**Seal material**

no media contact

**Housing material**

Plastic

Aluminium

Stainless steel (precision casting)

Stainless steel (electropolished)

**Protection rating**

IP66/IP67

IP66/IP68 (1 bar)

IP65

**VEGA**